

isc Silicon NPN Power Transistor


2SC3552

DESCRIPTION

- High Breakdown Voltage
- High Switching Speed
- Wide Area of Safe Operation


APPLICATIONS

- Designed for switching regulator applications.

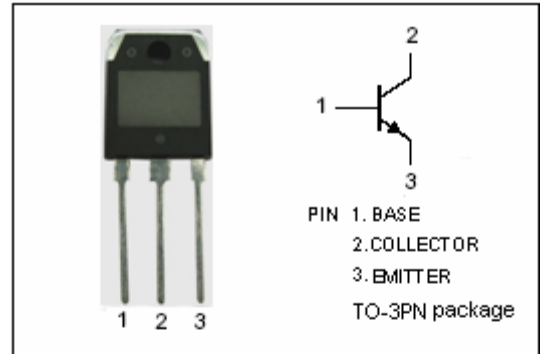

ABSOLUTE MAXIMUM RATINGS(T<sub>a</sub>=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V <sub>CBO</sub>	Collector-Base Voltage	1100	V
V <sub>CEO</sub>	Collector-Emitter Voltage	800	V
V <sub>EBO</sub>	Emitter-Base Voltage	7	V
I <sub>C</sub>	Collector Current- Continuous	12	A
I <sub>CM</sub>	Collector Current-Peak	30	A
I <sub>B</sub>	Base Current- Continuous	6	A
P <sub>C</sub>	Collector Power Dissipation @ T <sub>C</sub> =25°C	150	W
T <sub>J</sub>	Junction Temperature	150	°C
T <sub>stg</sub>	Storage Temperature Range	-55~150	°C

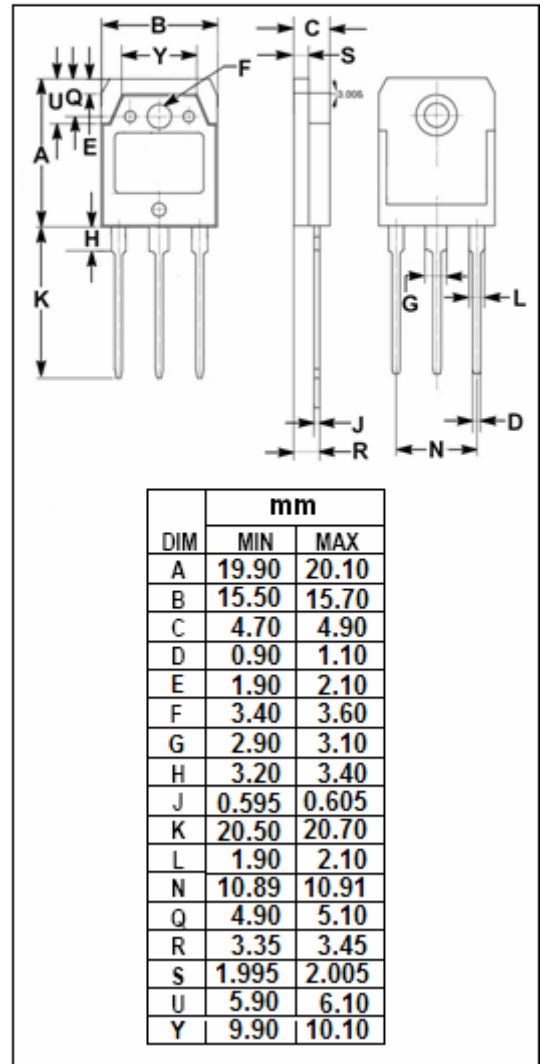

## isc Silicon NPN Power Transistor

## 2SC3552

## ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=5\text{mA}; R_{BE}=\infty$	800			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E=1\text{mA}; I_C=0$	7			V
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	$I_C=1\text{mA}; I_E=0$	1100			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=6\text{A}; I_B=1.2\text{A}$			2.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=6\text{A}; I_B=1.2\text{A}$			1.5	V
$I_{CBO}$	Collector Cutoff Current	$V_{CB}=800\text{V}; I_E=0$			10	$\mu\text{A}$
$I_{EBO}$	Emitter Cutoff Current	$V_{EB}=5\text{V}; I_C=0$			10	$\mu\text{A}$
$h_{FE-1}$	DC Current Gain	$I_C=0.8\text{A}; V_{CE}=5\text{V}$	10		40	
$h_{FE-2}$	DC Current Gain	$I_C=4\text{A}; V_{CE}=5\text{V}$	8			
$C_{OB}$	Output Capacitance	$I_E=0; V_{CB}=10\text{V}; f_{test}=1.0\text{MHz}$		215		pF
$f_T$	Current-Gain—Bandwidth Product	$I_C=0.8\text{A}; V_{CE}=10\text{V}$		15		MHz

## Switching Times

$t_{on}$	Turn-on Time	$I_C=8\text{A}; I_{B1}=1.6\text{A}; I_{B2}=-3.2\text{A}$ $R_L=500\Omega; V_{CC}=400\text{V}$			0.5	$\mu\text{s}$
$t_{stg}$	Storage Time				3.0	$\mu\text{s}$
$t_f$	Fall Time				0.3	$\mu\text{s}$

◆  $h_{FE-1}$  Classifications

K	L	M
10-20	15-30	20-40